






## HE-CONNECT

### Connecting box B125

EN124	B125	square frame	locking	double siphoning system
				

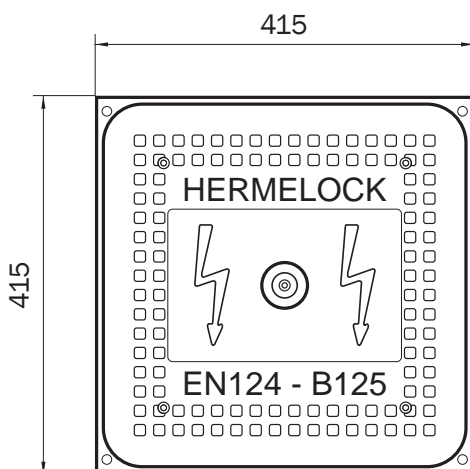

#### DESCRIPTION

Hermelock manhole covers are made of Polyurethane, reinforced with fiberglass with matching frame made of reinforced Polypropylene. Extremely suitable for electric power points for temporarily connections, connections for illuminated panels, for traffic lights etc. Product is delivered together with access chamber (round 315) with bottom. Also included 2 sealings to obtain watertightness, 1 to be putted into frame and 1 to create watertightness between frame and chamber Ø 315.

#### ADVANTAGE PRODUCT

- Watertight to drainage water by double siphon system.
- Resisting loads according to the standards EN-124 class B-125
- Anti slippery design with little noise
- A smell-proof sealing (Double siphoning system)
- A locking system in 4 points
- Colour: Black
- Special marking to indicate electrical connection.

#### MATERIAL

Composite material

#### PLACE OF INSTALLATION

Group 2, class B125 →see EN124.

For use in car parks and pedestrian areas where only occasional vehicular access is likely.

#### OPTION

- Key KE1



#### MANEUVERS OF THE COVER:

How to open the manhole cover:

1. Unlock 4 locking devices with means of hexagonal key 6mm or our key KE1 by turning into opposite way of clock, until resistance is felt or blocking.
2. Take out cover, this is easy with our key KE1

Pour refermer le couvercle, réaliser la manœuvre inverse à savoir:

1. Clean double siphon system in frame
2. Ensure that blocking device underneath cover is orientated to center cover.
3. Place cover in frame
4. By means of hexagonal key 6mm or key KE1 lock by turning way of clock, until resistance is felt. In his way block is lock underneath frame.
5. Cover is locked.

REFERENCE	ART.N°	KG	PACK.
HE-connect		15,60	-

Sizes in mm - Weights, sizes and sketch are indicative - Uncontrolled distribution.